

RGB + WIT

Technische Fiche



DU PONT
HANDEL EN MAATWERK

LED Flexible Strip 5050 Series LM5050-WN96-24V-RGBW-12mm



Product Feature

◆ **96** leds per meter, 5 meters per roll, the theoretical power **23W/meter**, Actual power: W/m, light angle 120 degrees. **10-13lm** per led chip. Can be customized according to needed.

◆ Flexible, cuttable, back with 3M double-sided adhesive, can be installed in the concave convex surface, easy to install.

◆ Led strip supports external light regulator type: 0/1-10V PWM Dali Dimmable inductive switch controller.

◆ Cutting unit is **62.5mm**, **6** led chips can be used as a unit, cutting does not affect other parts. Normal length is 5 meters, other lengths also acceptable.

◆ Low power consumption, low fever, no glare, impact resistance, energy saving and environmental conservation.

◆ LED can be customized to glue dust (IP65), (IP66), silicone casing plus glue waterproof (IP68);

◆ Life time: Mean time between failure (MTBF): 50-100K hour

CE RoHS FC

Technical Parameters

Mode	LED Q'ty/M	Color temperature		CRI(Ra)		Voltage (V DC)	Electric current (A/m)	Power ± 10% (W/m)			Lm/m ± 10%	FPC Width
				Min	Max			Actual	Min	Max		
LM5050-WN96-RGBW-24V	96	White	6000-6500K	80+	90+	24	0.958		4	23	533.6	12mm
		Natural White	4000-4500K									
		Warm white	2200-3200K									
		Red	620-625nm									
		Blue	455-460nm									
		Green	520-525nm									
		Yellow	590-592nm									




DU PONT
HANDEL EN MAATWERK

RGB + WIT

Technische Fiche


Dimension(mm/inch)

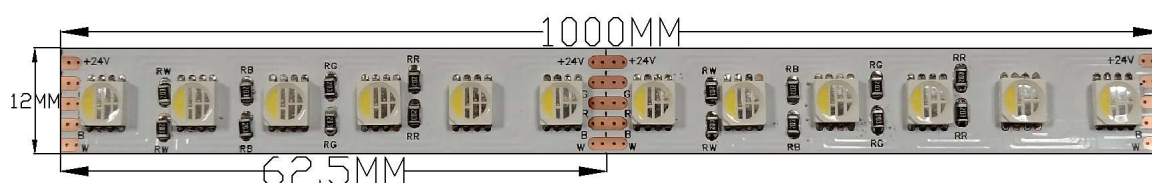


Product Electrical




Linking Operation

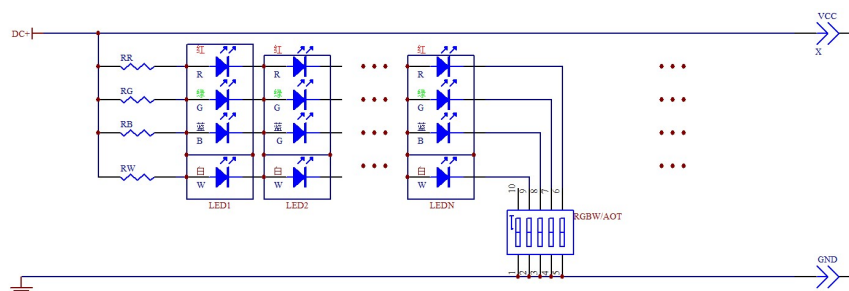

Installation

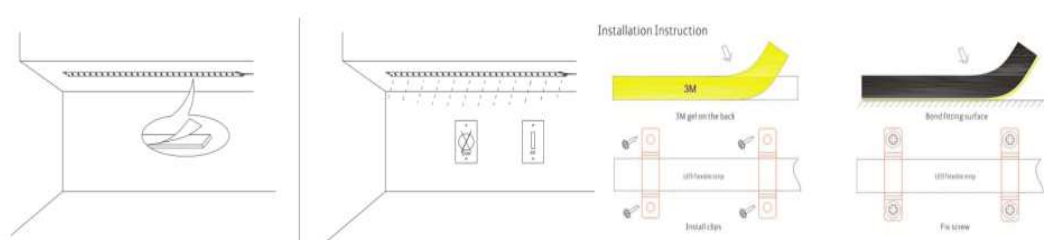

Product Packaging

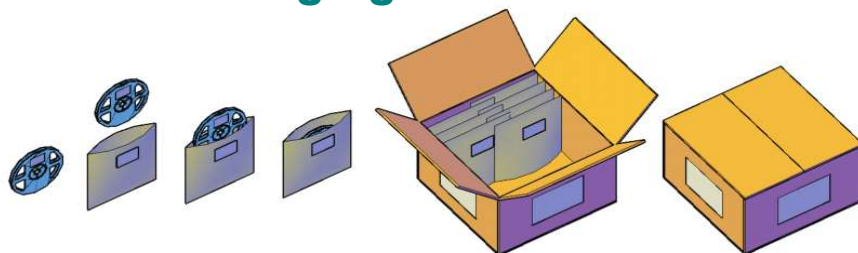

Safety Information

- The strip itself and all its components may not be mechanically stressed.
- Assembly must not damage or destroy conducting paths on the circuit board.
- Installation of LED ribbon (with power supplies) needs to be made with regard to all applicable electrical and safety standards. Only qualified personnel should be allowed to perform installations.
- Correct electrical polarity needs to be observed. Wrong polarity may destroy the strip.
- Parallel connection is highly recommended as safe electrical operation mode.
- Serial connection is not recommended. Unbalanced voltage drop can cause hazardous overload and damage the strip.
- Please ensure that the power supply is of adapters power to operate the total load.
- When mounting on metallic or otherwise conductive surfaces, there needs to be an electrical isolation points between strip and the mounting surface.
- Pay attention to standard ESD precautions when installing the strip.
- Damaged by corrosion will not be honored as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements.