




DU PONT
HANDEL EN MAATWERK

LED strips 120 LEDS

Technische Fiche

LED Flexible Strip 5mm 3528 Series LM3528-120D-12V/24V

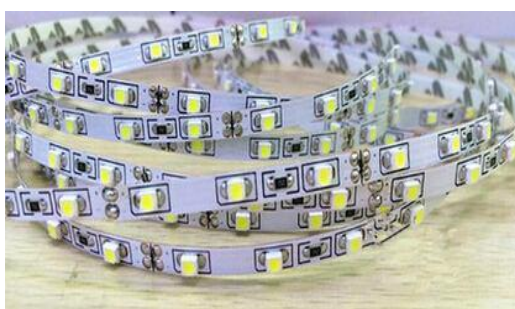

Product feature

- ◆ 5 meters roll, every 120 meters lamp, the theoretical power per meter 7.2W, Power rating:36W/5M ,angle light 120 degrees. 6-9lm of each light bead can be customized according to needed.
- ◆ curved, soft, soft and compact, back with 3M double-sided adhesive can be installed in the concave convex surface, easy to install
- ◆ Lamp strip supports external light regulator type: 0/1-10V PWM Dali Dimmable inductive switch controller
- ◆ each 2.5 or 5 cm , three or six beads can be used as a unit of shear, cut does not affect other parts. 5 meters in length can be adjusted according to production requirements.
- ◆ low power consumption, low fever, no glare, impact resistance, energy saving and environmental protection.
- ◆ can be customized to glue dust (IP65), (IP66), silicone casing waterproof glue waterproof (IP68);
- ◆ LED Life time: Mean time between failure(MTBF):50-100K hour

Technical parameters



Mode	LED Q'ty/M	Color	CCT/Chromaticity	Lumen/led (lm)	CRI(Ra)	Voltage (V DC)	Electric current (A/m)	Power±10%(W/m)	Lm/m ±10%	FPCWidth /thickness	
LM3528-WN-120-5MM	3528SMD 120PCS/M	Natural White	4000-4200K	7-8lm	75-90	12/24	0.6/0.3	7.2	620LM	IP20	5mm/2 Ounce
		White	6000-6500K								
		warm white	2600-2800K	6-8lm					590LM	IP65	
		warm white	3000-3200K								
		Red	617-627nm	--	590LM				IP67		
		Blue	464-474nm	--							
		Green	515-525nm	--	530LM				IP68		
		Yellow	585-600nm	--							




DU PONT
HANDEL EN MAATWERK

LED strips 120 LEDS


Technische Fiche

Dimension(mm/inch)


12V

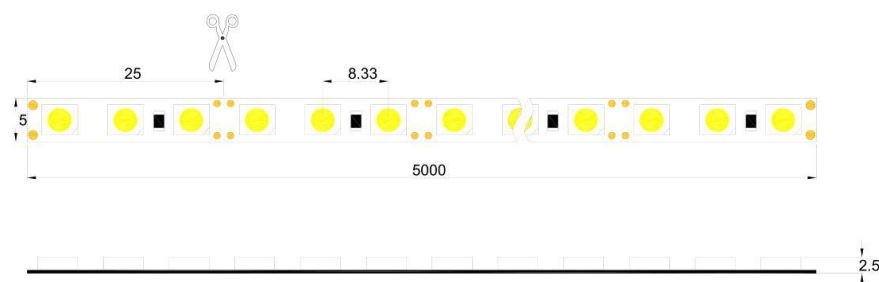

24V

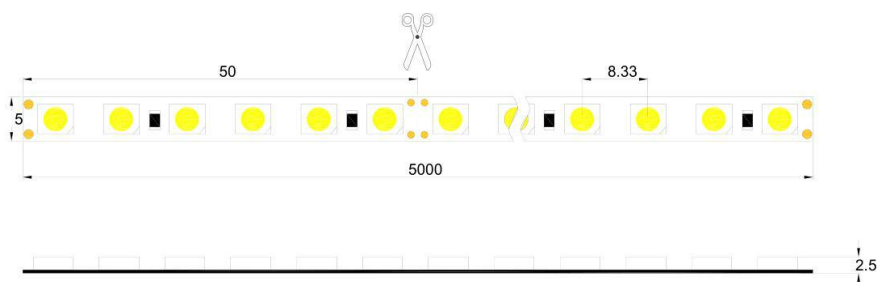


Linking operation



Notes: In order to better achieve product luminous effect, each 5 meters long lamp with power supply cable (regional), suggest that are connected to the power line

installation

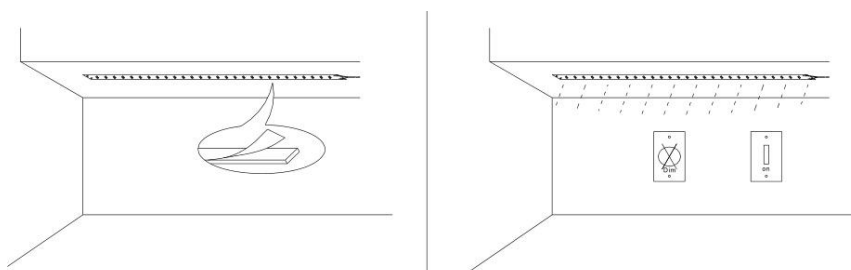




DU PONT
HANDEL EN MAATWERK

LED strips 120 LEDS

Technische Fiche

Product packaging

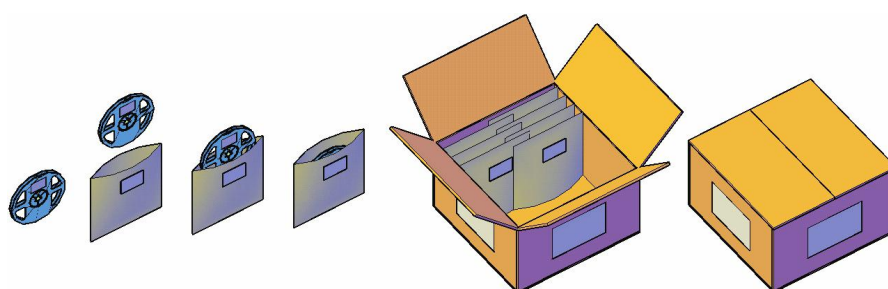

Safety Information

- The strip itself and all its components may not be mechanically stressed.
 - Assembly must not damage or destroy conducting paths on the circuit board.
 - Installation of LED ribbon (with power supplies) needs to be made with regard to all applicable electrical and safety standards. Only qualified personnel should be allowed to perform installations.
 - Correct electrical polarity needs to be observed. Wrong polarity may destroy the strip.
 - Parallel connection is highly recommended as safe electrical operation mode.
 - Serial connection is not recommended. Unbalanced voltage drop can cause hazardous overload and damage the strip.
 - Please ensure that the power supply is of adapters power to operate the total load.
 - When mounting on metallic or otherwise conductive surfaces, there needs to be an electrical isolation points between strip and the mounting surface.
 - Pay attention to standard ESD precautions when installing the strip.
 - Damaged by corrosion will not be honored as a materials defect claim.
- It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements.